

BIOCAT - Filter

Biological Catalytic - Filter




Construction

Halls and containers

BIOCAT-Filter

Biological air treatment is for various companies and municipalities an economic and efficient solution to reduce odours, hazardous substances and solvents in the exhaust air. BIOCAT-Filters have successfully assembled been used in various application areas for many years.

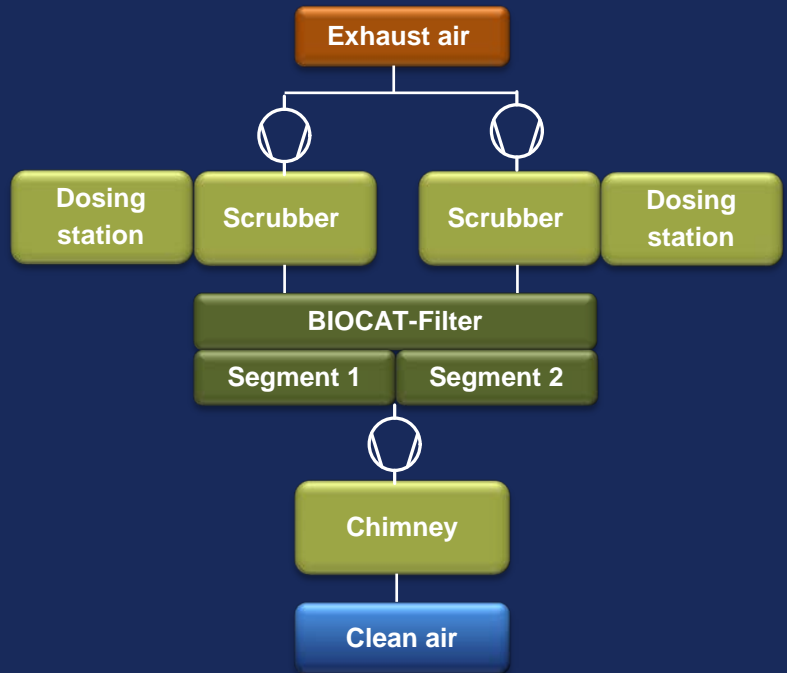

Advantages

- High efficiency in removing odours
- Effective separation of dusts and aerosols
- High level of operational reliability and plant availability
- Low operating costs , e.g. due to low pressure losses in the entire plant
- Low investment costs because of a compact and space saving construction
- No discharge of increased secondary emissions (NO_x, SO₂, dioxins etc.)
- The system's modular construction:
- The plant can be adapted to changed input parameters step-by-step
- Separate activation and deactivation of the individual BIOCAT-Filter segments for maintenance work



Wessel-Umwelttechnik GmbH

Bötelkamp 38
22529 Hamburg
Deutschland

Tel.: +49 40 22 868 19-0
Fax: +49 40 22 868 19-99

E-Mail: info@wessel-umwelttechnik.de
www.wessel-umwelttechnik.de